

Rotary Monoblock Filler and Capper

Features

- Capacity 500 gms to 5 kg. (can be customized for higher pack sizes)
- Directly integrated Drive (No belts no chains)
- Tool less change over
- Quick change over
- Covers and skirting labyrinth design for avoiding leakages (No. Seals)
- Modular design
- Drip free nozzles
- Nozzles can be indexed up to 30 degrees to facilitate container mouth change.
- Smooth drains (curved not square or V shaped)
- Life time lubricated bearings
- PLC controlled
- Large size touch screen on operator panel.
- Plug and play load cell modules (no external PCBs)
- Motorized up and down movement of tank along with nozzles.
- Floor below the machine accessible for cleaning



Specifications






Model	Filling Stations	Capping Stations	Filling Range	Packing Capacity
SF-WF-R-16X6	16	6	500 ml - 5000 ml	*1000 ml - 80 - 90 BPM *5000 ml - 40 - 45 BPM
SF-WF-R- 20 X 8	20	8	500 ml - 5000 ml	*1000 ml - 110 - 120 BPM *5000 ml - 50 - 60 BPM



SPANPAK

We fill what flows...

Rotary Monoblock Filler and Capper

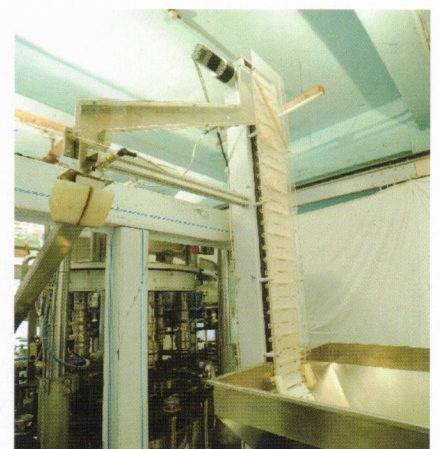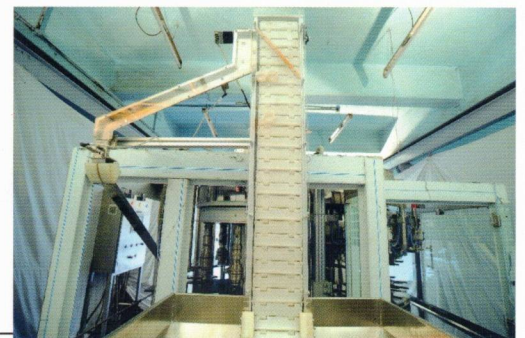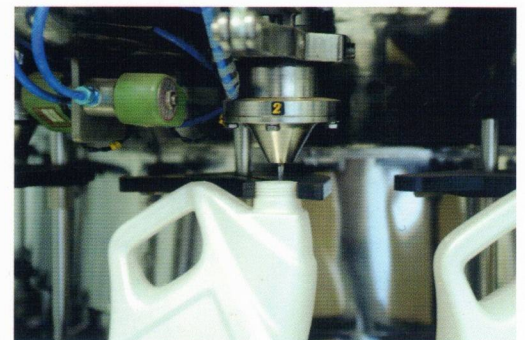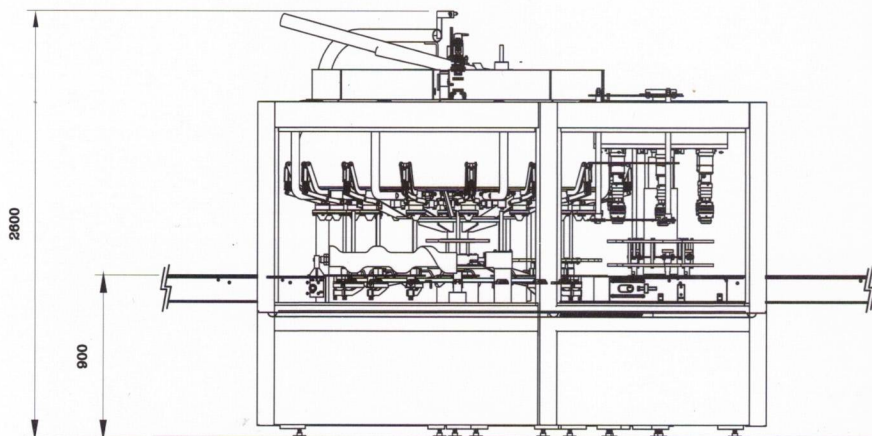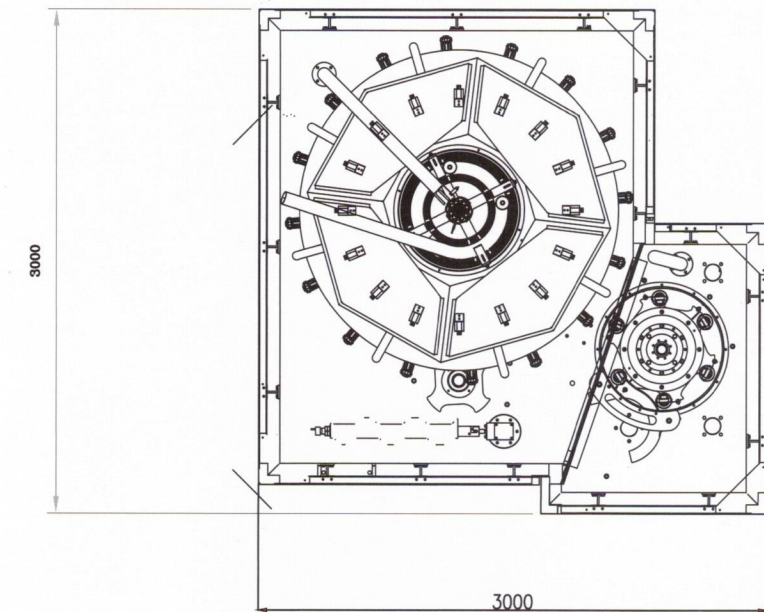

Spherotech
Packaging India Pvt. Ltd.

NSIC - CRISIL MSE 3* ISO 9001: 2015

201, Gold Crest Business Park, Opp. Shreyas Cinema, L.B.S. Marg
Ghatkopar West, Mumbai - 400 086. India.

Tel: +91-22-2500 5773 Fax: +91-22-2500 3378

Email: sales@spherotech.biz | info@spherotech.biz

Website: www.spherotechpackaging.com | www.fillingmachine.co

